


# PV Modules

## *Battery Charging Applications*

The modules specified overleaf are for battery charging applications. This makes them suitable for medium to large domestic use, mobile caravans etc. These are for 12V applications ranging from 40W to 135W

- Quality, Protective Design
- Rugged Junction Box
- Robust for Extreme Conditions
- Long Term Performance Warranties

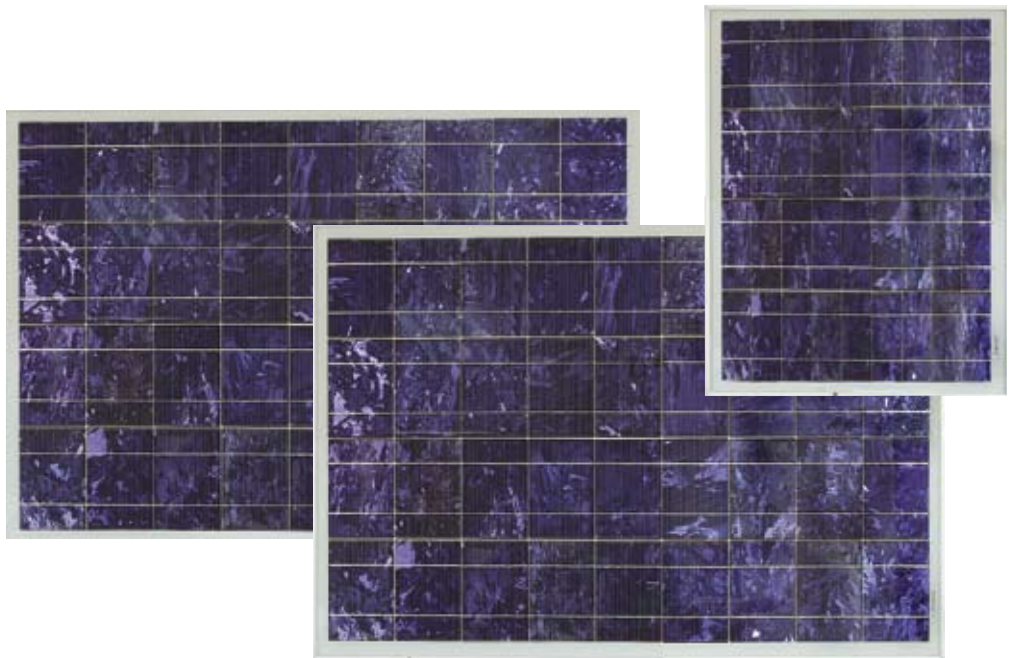

## Silicon CPV plc – PV Modules

Silicon CPV plc's range of quality flat-plate PV modules is manufactured at the Company's state-of-the-art production facility in Pakistan. The modules utilize Polycrystalline Silicon Cells and provide an energy conversion efficiency of up to 16%.

### Superior by Design

The PV modules employ Glass-Tedlar technology. The Polycrystalline Silicon cells are embedded in flexible transparent EVA to resist UV and protect the cells from degradation, ensuring superb reliability whatever the operating climate. The modules are protected by highly transparent tempered glass to provide excellent protection against adverse environmental conditions such as rain, snow, hail, ice and storms. The back of the module is sealed with high quality Tedlar and the entire laminate is installed within an anodized aluminium frame to provide structural strength and ease of installation. Holes in the hollow section prevent the build up of condensation and damage to the frame from freezing.

### Electrical Connections

Electrical connection to the PV module is made via a highly durable, patented junction box. It has a dust proof and splash proof housing using securely welded joints which protect against moisture ingress and corrosion. Its excellent capacity to dissipate heat results in a lower operating temperature for improved reliability.

### Durability and Reliability

Silicon CPV plc's modules were designed to provide very long term durability with built in reliability and comply with the requirements of IEC 61215 which defines the capability of a PV module to withstand prolonged exposure within a number of defined climatic environments.

### Quality

Quality is a core value of Silicon CPV plc and all PV modules are manufactured under the control of the Company Quality Assurance system. The QA system includes specific QC procedures which ensure that the modules are manufactured to meet the stringent testing requirements defined by the Company and the appropriate parts of IEC 61215 and IEC 61730

### Performance Warranties

Silicon CPV plc has such trust in its products that it expects them to operate continuously for many years and therefore confidently provides a 25 year power output warranty and a 2 year workmanship warranty.

### Recyclable

Silicon CPV plc's PV products can be recycled at the end of their natural life. The Company will be happy to discuss your recycling requirements at any time.

### Specifications

		P40-12	P45-12	P85-12	P90-12	P130-12	P135-12
<b>ELECTRICAL</b>							
Maximum Power	Pmax	40W	45W	85W	90W	130W	135W
Open Circuit Voltage	Voc	22.24V	22.22V	22.12V	22.22V	22.05V	22.21V
Max Power Point Voltage	Vmpp	17.85V	17.9V	17.75V	17.85V	17.5V	17.81V
Short Circuit Current	Isc	2.45A	2.73A	5.28A	5.45A	7.88A	7.93A
Max Power Point Current	Imp	2.26A	2.52A	4.79A	5.05A	7.43A	7.58A
Cells per module		36	36	36	36	36	36
Cell Type		Polycrystalline	Polycrystalline	Polycrystalline	Polycrystalline	Polycrystalline	Polycrystalline
<b>DIMENSIONS</b>							
CELL (L) x (W)	cm	5.2x15.6	5.2x15.6	10.4x15.6	10.4x15.6	15.6x15.6	15.6x15.6
MODULE (L) x (W) x (D)	cm	51.5x66.5x3.4	51.5x66.5x3.4	98.5x66.5x3.4	98.5x66.5x3.4	145.5x66.5x3.4	145.5x66.5x3.4
Module Weight	kg	5	5	8.5	8.5	12	12

<b>MECHANICAL</b>	
Frame:	Aluminium
Front	Tempered Glass
Back	Tedlar
Cell Encapsulation	EVA
Junction Box	IP65 (PPE)
Connector	MC Type 4
<b>TEMPERATURE COEFFICIENT</b>	
Current Temperature Coefficient	+4.40 mA/K
Power Temperature Coefficient	-0.46 %/K
NOCT Normal Operating Cell Temperature	48°C ± 2°C
<b>LIMITS</b>	
Operating Temperature Limits	-25°C to +85°C
Power Tolerance	+/- 3%
Maximum System Voltage	1,000V DC

Silicon CPV plc, Akhter House, Perry Road, Harlow, Essex, CM18 7PN, UK

Tel: 01279 821260 Fax: 01279 821300

Email: sales@SiliconCPV.com

www.SiliconCPV.com

