


PV Modules

Low Voltage Applications

The modules specified overleaf are for low voltage applications. This makes them suitable for small to medium sized portable devices, with a 6V to 12V range using from 5W to 20W

- Quality, Protective Design
- Horizontal or Vertical Positioning
- Robust for Extreme Conditions
- Long Term Performance Warranties

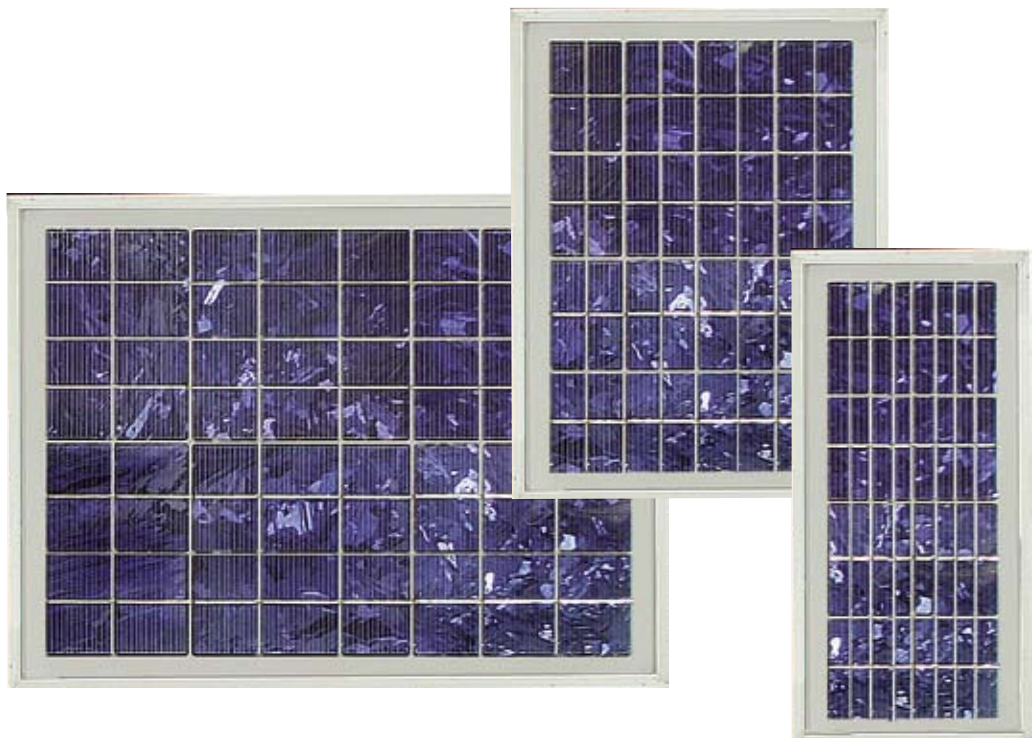

Silicon CPV plc – PV Modules

Silicon CPV plc's range of quality flat-plate PV modules is manufactured at the Company's state-of-the-art production facility in Pakistan. The modules utilize Polycrystalline Silicon Cells and provide an energy conversion efficiency of up to 16%.

Superior by Design

The PV modules employ Glass-Tedlar technology. The Polycrystalline Silicon cells are embedded in flexible transparent EVA to resist UV and protect the cells from etching, ensuring superb reliability whatever the operating climate. The modules are protected by highly transparent tempered glass to provide excellent protection against adverse environmental conditions such as rain, snow, hail, ice and storms. The back of the module is sealed with high quality Tedlar and the entire laminate is installed within an anodized aluminium frame to provide structural strength and ease of installation. Holes in the hollow section prevent the build up of condensation and damage to the frame from freezing.

Electrical Connections

Electrical connection to the PV module is made via a highly durable, patented junction box. It has a dust proof and splash proof housing using securely welded joints which protect against moisture ingress and corrosion. Its excellent capacity to dissipate heat results in a lower operating temperature for improved reliability.

Durability and Reliability

Silicon CPV plc's modules were designed to provide very long term durability with built in reliability and comply with the requirements of IEC 61215 which defines the capability of a PV module to withstand prolonged exposure within a number of defined climatic environments (specified in the standard).

Quality

Quality is a core value of Silicon CPV plc and all PV modules are manufactured under the control of the Company Quality Assurance system. The QA system includes specific QC procedures which ensure that the modules are manufactured to meet the stringent testing requirements defined by the Company and the appropriate parts of IEC 61215 and IEC 61730

Performance Warranties

Silicon CPV plc has such trust in its products that it expects them to operate continuously for many years and therefore confidently provides a 25 year power output warranty and a 2 year workmanship warranty.

Recyclable

Silicon CPV plc's PV products can be recycled at the end of their natural life. The Company will be happy to discuss your recycling requirements at any time.

Specifications

		P5-06	P10-06	P5-12	P10-12	P20-12
ELECTRICAL						
Maximum Power	Pmax	5W	10W	5W	10W	20W
Open Circuit Voltage	Voc	11.1v	11.1v	22.2v	22.2v	22.2v
Max Power Point Voltage	Vmp	8.1V	8.1V	16.2V	16.2V	16.2V
Short Circuit Current	Isc	0.68A	1.35A	0.35A	0.68A	1.35A
Max Power Point Current	Imp	0.63A	1.25A	0.31A	0.63A	1.25A
Cells per module		16	16	32	32	32
Cell Type		Polycrystalline	Polycrystalline	Polycrystalline	Polycrystalline	Polycrystalline
DIMENSIONS						
CELL (L) x (W)	cm	2.6x7.8	5.2x7.8	1.3x7.8	2.6x7.8	5.2x7.8
MODULE (L) x (W)	cm	14.5x34.5x3.4	24.5x34.5x3.4	14.5x34.5x3.4	24.5x34.5x3.4	45.5x34.5x3.4
Module Weight	kg	2.1	2.8	2.1	2.8	3.2

MECHANICAL	
Frame:	Aluminium
Front	Tempered Glass
Back	Tedlar
Cell Encapsulation	EVA
Junction Box	IP65 (PPE)
Connector	MC Type 4
TEMPERATURE COEFFICIENT	
Current Temperature Coefficient	+4.40 mA/K
Power Temperature Coefficient	-0.46 %/K
NOCT Normal Operating Cell Temperature	48°C ± 2°C
LIMITS	
Operating Temperature Limits	-25°C to +85°C
Power Tolerance	+/- 3%
Maximum System Voltage	1,000V DC

Silicon CPV plc, Akhter House, Perry Road, Harlow, Essex, CM18 7PN, UK

Tel: 01279 821260 Fax: 01279 821300

Email: sales@SiliconCPV.com

www.SiliconCPV.com

